

Gigaset SL78H




Issued by
Gigaset Communications GmbH
Schlavenhorst 66, D-46395 Bocholt
Gigaset Communications GmbH is a trademark licensee of Siemens AG

© Gigaset Communications GmbH 2008
All rights reserved.
Subject to availability. Rights of modifications reserved.

www.gigaset.com

SIEMENS

Brief overview

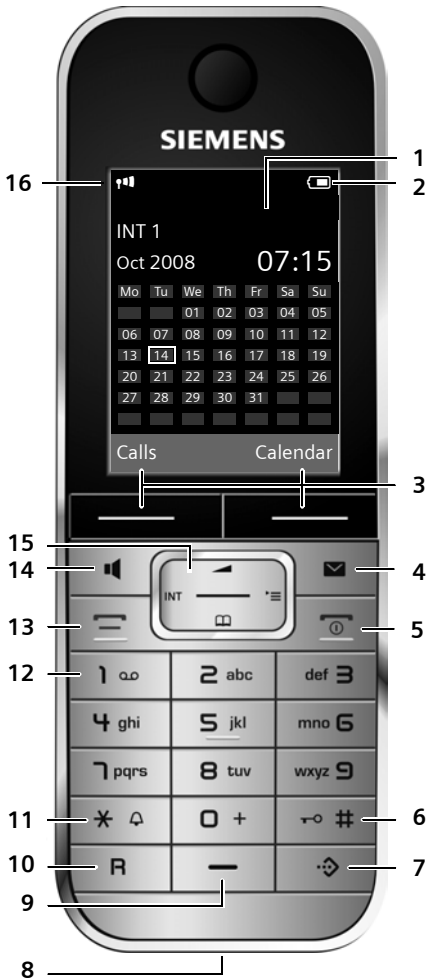

- 1 **Display** in idle status
- 2 **Battery charge status** (→ page 14)
- 3 **Display keys** (→ page 17)
- 4 **Message key** (→ page 30)
Access to calls and message lists;
flashes: new message or new call
- 5 **End call key, On/Off key**
End call, cancel function, go back one menu level (press briefly), back to idle status (press and hold), activate/deactivate handset (press and hold in idle status)
- 6 **Hash key**
Keypad lock on/off (press and hold in idle status);
toggles between upper/lower case and digits
- 7 **Call-by-call list key** (→ page 25)
Open call-by-call list
- 8 **Charging socket**
- 9 **Microphone**
- 10 **Recall key**
- Consultation call (flash)
- Insert a dialling pause (press and hold)
- 11 **Star key**
Ring tones on/off (press and hold);
with an open connection: switch between dial pulsing/touch tone dialling (press briefly);
for text input: open a table of special characters
- 12 **Key 1**
Dial (network) answer machine (press and hold)
- 13 **Talk key**
Answer a call: open last number redial list (press briefly), start dialling (press and hold)
- 14 **Handsfree key**
Switch between earpiece and handsfree mode;
lights up: handsfree activated
flashes: incoming call
- 15 **Control key** (→ page 16)
- 16 **Signal strength** (→ page 14)

Display symbols

The following symbols are displayed independently from the settings and the operating status of your phone:

Signal strength (→ page 14)
 or ECO mode symbol (→ page 33)

Bluetooth activated (→ page 38)
 or (Bluetooth headset/data device) connected

Ring tone switched off (→ page 42)

Keypad lock switched on (→ page 19)

Battery being charged (→ page 14)

Battery charge status (→ page 14)

Number of new messages:
 ♦ in the list of missed appointments (→ page 35)
 ♦ in the SMS list (**dependent on base station**)
 ♦ in the list of missed calls (→ page 30)
 ♦ on the (network) answer machine (→ page 30)

Name of handset

Current month and year (→ page 14)

Alarm clock activated with wake-up time (→ page 35)

Current time (→ page 14)

Appointment entered in calendar (→ page 33)

Current day (→ page 14)

Signalling of

external call (→ page 23)



alarm clock (→ page 35)



internal call (→ page 24)



appointment (→ page 33) / anniversary (→ page 29)



Contents

Brief overview	1
Safety precautions	5
First steps	6
Check the pack contents	6
Installing the charging cradle	7
Setting up the handset for use	8
Setting the date and time	12
Connecting the USB data cable	14
What would you like to do next?	15
Using the phone	16
Control key	16
Display keys	17
Keys on the keypad	17
Correcting incorrect entries	17
Menu guidance	18
Activating/deactivating the handset	19
Activating/deactivating the keypad lock	19
Illustration of operating steps in the user guide	20
Menu tree	22
Making calls	23
Making an external call	23
Ending a call	23
Accepting a call	23
Handsfree talking	24
Switch to mute	24
Making internal calls	24
Using the directory and lists	25
Directory/call-by-call list	25
Last number redial list	29
Call lists	29
Opening lists with the message key	30
Using the network mailbox	32
Configuring fast access for the network mailbox	32
Viewing the network mailbox report	32
ECO DECT	33
Setting an appointment (calendar)	33
Displaying missed appointments, anniversaries	35
Setting the alarm clock	35
Using a handset as a room monitor	36

Using Bluetooth devices	37
Handset settings	39
Quick access to functions and numbers	39
Changing the display language	40
Setting the display	40
Activating/deactivating auto answer	41
Changing the handsfree/earpiece volume	41
Changing ring tones	41
Activating/deactivating advisory tones	43
Setting your own area code	43
Restoring the handset default settings	43
Service (Customer Care)	44
Questions and answers	45
Authorisation	45
Environment	46
Appendix	47
Care	47
Contact with liquid	47
Specifications	47
Writing and editing text	47
Additional functions via the PC interface	48
Accessories	49
Index	50

Safety precautions

Warning

Read the safety precautions and the user guide before use.

Explain their content and the potential hazards associated with using the telephone to your children.



Only use the charging cradle supplied with mains adapter.



Only use **recommended, rechargeable batteries** (→ page 47). Failure to do so could damage your health and cause injury.



The operation of medical appliances may be affected. Be aware of the technical conditions in your particular environment, e.g. doctor's surgery.



Do not hold the rear of the handset to your ear when it is ringing or when the handsfree function is activated. Otherwise you risk serious and permanent damage to your hearing.

The handset may cause an unpleasant humming noise in hearing aids.



Do not install the charging cradle in bathrooms or shower rooms. The charging cradle is not splashproof (→ page 47).



Do not use your phone in environments with a potential explosion hazard (e.g. paint shops).



If you give your Gigaset to someone else, make sure you also give them the user guide.



Please remove faulty base stations from use or have them repaired by our service, as they could interfere with other wireless services.

Please note

Not all of the functions described in this user guide are available in all countries.

First steps

Check the pack contents



- 1 one Gigaset SL78H handset,
- 2 one battery,
- 3 one battery cover,
- 4 one belt clip,
- 5 one charging cradle with mains adapter,
- 6 one user guide,
- 7 USB data cable,
- 8 CD-ROM (driver for the USB data cable).

Installing the charging cradle

The charging cradle is designed to be operated in enclosed, dry areas at temperatures ranging from +5°C to +45°C.

Please note

Pay attention to the range of the base station.

This is up to 300 m in unobstructed outdoor areas and up to 50 m inside buildings. The range is reduced when Eco Mode is activated (→ page 33).

The phone's feet do not usually leave any marks on surfaces. However, due to the multitude of different varnishes and polishes used on today's furnishings, the occurrence of marks on the surfaces cannot be completely ruled out.

Please note:

- ◆ Never expose the telephone to the influence of heat sources, direct sunlight or other electrical devices.
- ◆ Protect your Gigaset from moisture, dust, corrosive liquids and vapours.

Setting up the handset for use

The display and keypad are protected by a plastic film.
Please remove protective film.

Inserting the battery and closing the battery cover

Warning

Use only the rechargeable batteries (→ page 47) recommended by Gigaset Communications GmbH *, as this could otherwise result in significant health risks and damage to property. For example, the outer casing of the batteries could be destroyed or the batteries could explode. The phone could also malfunction or be damaged as a result of using batteries that are not of the recommended type.

* Gigaset Communications GmbH is a trademark licensee of Siemens AG.

- ▶ First insert the battery at the top **a**.
- ▶ Then press the battery downwards **b** until it clicks into place.



- ▶ First, align the protrusions on the side of the battery cover with the notches on the inside of the housing.
- ▶ Then press the cover until it clicks into place.

If you need to **open the battery cover again** to connect the USB data cable or change the battery:

- ▶ Remove the belt clip (if fitted).
- ▶ Use a fingernail placed into the notch at the bottom of the casing to pull the battery cover upwards.




To **change the battery**, place your fingernail in the cavity on the casing and pull the battery upwards.



Attaching/removing the belt clip

The handset has notches on each side for mounting the belt clip.

- ▶ **To attach:** Press the belt clip onto the back of the handset so that the protrusions on the belt clip engage with the notches.
- ▶ **To remove:** Use the right thumb to press the belt clip slightly to the right of centre, slide the fingernail of the left hand index finger between the clip and the casing and lift the clip upwards.

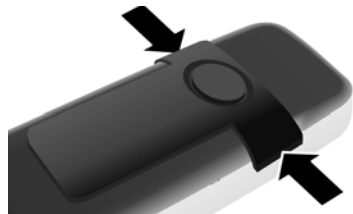

Placing the handset in the charging cradle

- ▶ Insert the mains adapter for the charging cradle into the mains socket.
- ▶ Place the handset in the charging cradle with its **display facing forward**.

To charge the battery, leave the handset in the charging cradle.

Please note

Only place the handset in the charging cradle that is intended for it.

Registering handsets

A Gigaset SL78H handset can be registered to up to four base stations.


Registration of Gigaset SL78H

You must initiate handset registration on the handset and on the base station. Once it has been registered, the handset returns to idle status. The handset's internal number is shown in the display e.g. INT 1. If not, repeat the procedure.


On the handset



- ▶ Press the key below **Register** on the display screen to open the input field.

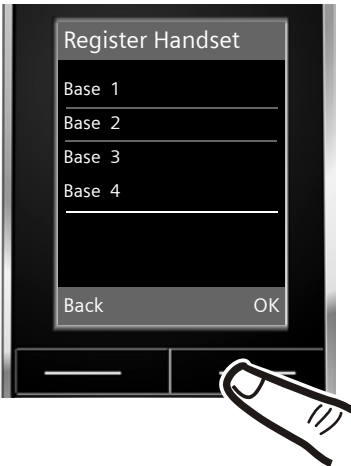

The submenu Register Handset is shown in the display.



- ▶ Press **downwards** on the control key to select the required base station.

- ▶ Press the key below **OK** on the display screen to start the registration. If requested, enter the system PIN of the base station (the default is 0000) and press **OK**.

The display indicates that a base station that is ready for registration is being searched for.

Please note

If the handset is already registered to a base station, start the registration procedure as follows:

 →  → Registration → Register Handset

On the base station

Within 60 seconds press and **hold** the registration/paging key on the base station (approx. 3 sec.).

Please note

Information on how to de-register can be found in your base station's user guide.

First battery charge and discharge

The correct charge status can only be displayed if the battery is first fully charged **and** discharged.



► For this, place the handset in the charging cradle for **six** hours.


► Once the battery is fully charged, remove the handset from the cradle and do not put it back again until the battery is fully discharged.

Please note

- ◆ After the first battery charge **and** discharge, you may place your handset in the charging cradle after every call.
- ◆ Always repeat the charging and discharging procedure if you remove the battery from the handset and reinsert it.
- ◆ The battery may heat up during charging. This is not dangerous.
- ◆ After a time, the charge capacity of the battery will decrease for technical reasons.

Setting the date and time

Set the date and time so that the correct date and time can be assigned to incoming calls, and so that the alarm and the calendar can be used.

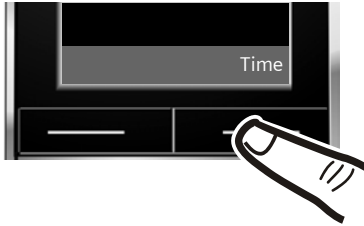

- ▶ Press the key below **Time** on the display screen to open the input field. (If you have already entered the date and time, open the input field via the menu → page 22.)




The submenu Date/Time is shown in the display.


- ▶ The active input position flashes. Using the keypad, enter the day, month and year using 8 characters, e.g.

1	00	4	ghl	1	00	0	+	2	abc	0	+
0	+	8	uv								

 for 14/10/2008.



Should you wish you change the input position (for example to correct an entry), press **right** or **left** on the control key.




- ▶ Press **downwards** on the control key to skip to the input field for the time.

- ▶ Enter the hours and minutes as four digit numbers via the handset e.g.

0	+	7	pqr	1	00	5	jkl
---	---	---	-----	---	----	---	-----

 for 07:15. Change the input position, using the control key if necessary.



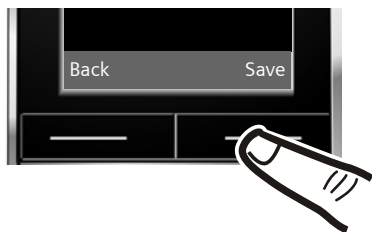

- ▶ Press the key below **Save** on the display screen to save your entries.








The display shows **Saved**. You will hear a confirmation tone.



- ▶ Press the key below **Back** on the display screen to return to idle status.

Display in idle status

Once the phone is registered and the time set, the idle display is shown as in this example. After successful registration the following is displayed:

- ◆ the strength of the reception signal between base station and handset:
 - good to poor: 
 - no reception:  flashes
- ◆ battery charge status:
 -  (flat to full)
 -  flashing: battery almost flat
 -  (charging)



Your phone is now ready for use!

Please note

- ◆ The range icon is only displayed in idle status if Eco Mode+ is deactivated (→ page 33).
- ◆ In idle status, the calendar display can be switched on and off (→ page 33).

Connecting the USB data cable

You can connect the supplied USB data cable to the back panel of your telephone to connect the telephone to a PC (→ page 48).

- ▶ Remove the belt clip (if fitted) (→ page 9).
- ▶ Remove the battery cover (→ page 9).
- ▶ Connect the USB data cable to USB socket **1**.



What would you like to do next?

Now you have successfully started your Gigaset, you will probably want to adapt it to your personal requirements. Use the following guide to quickly locate the most important subjects.

If you are unfamiliar with menu-driven devices such as other Gigaset telephones, you should first read the section entitled "Using the phone"



→ page 16.

Information on is located here.
Setting the ring tone and volume	page 41
Setting the handset volume	page 41
Setting Eco Mode / Eco Mode+	page 33
Transferring directory entries from existing Gigaset handsets to the new handset(s)	page 27
Using Bluetooth devices	page 37
Connecting the telephone to a PC	page 48

If you have any questions about using your phone, please read the tips on troubleshooting (→ page 45) or contact our Customer Care team (→ page 44).

Using the phone





Control key

In the text below, the side of the control key that you must press in the operating situation described is marked in black (top, bottom, right, left, centre), e.g.  for "press right on the control key" or  for "press the centre of the control key".





The control key has a number of different functions:





When the handset is in idle status

-  Open the directory.
-  Open the main menu.
-  Open the list of handsets.
-  Call up the menu for setting the handset's call volume (→ page 41), ring tones (→ page 41) and advisory tones (→ page 43).




In the main menu, in submenus and lists

-  /  Scroll up/down line by line.

In input fields

You can use the control key to move the cursor up , down , right  or left .

During an external call

-  Open the directory.
-  Initiate an internal consultation call.
-  Adjust the loudspeaker volume for earpiece and handsfree mode.

Functions when clicking on the middle of the control key

The key has different functions, depending on the operating situation.


- ◆ **In idle status** the main menu is opened.
- ◆ **In the submenus, selection and input fields** the key takes on the function of the display keys **OK**, **Yes**, **Save** or **Change**.

Please note

In this guide, operation is shown via the right control key and the display keys. However, if you prefer, you can also use the control key as described.

Display keys





The function of the display keys changes depending on the particular operating situation. Example:

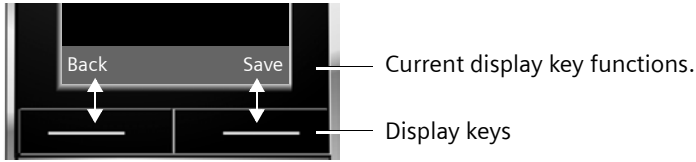

Important display keys include:

Options	Open a context-dependent menu.
OK	Confirm selection.
< C	Delete key: backspace delete one character at a time.
Back	Go back one menu level or cancel operation.
Save	Save entry.
→→	Open the last number redial list.

Keys on the keypad

 /  /  etc.	Press the matching key on the handset.
	Enter digits or letters.

Correcting incorrect entries


You can correct incorrect characters in the input fields by navigating to the incorrect entry using the control key. You can then:

- ◆ Press the display key **<C** to delete the character to the left of the cursor,
- ◆ Insert characters to the left of the cursor
- ◆ Overwrite the highlighted (flashing) character, e.g. when entering the time or date.

Menu guidance


Your telephone's functions are accessed using a menu that has a number of levels.


Main menu (first menu level)


- ▶ Press the control key **right**  in the handset's idle status to open the main menu.

The main menu functions are shown in the display using symbols. The selected function is indicated by means of an orange circle around the symbol, and the associated name appears in the header of the display.

To access a function, i.e. to open the corresponding submenu (next menu level):

- ▶ Using the control key , navigate to the required function and press the display key **OK**.


Press the display key **Back** or the end call key  **briefly** to return to idle status.





Submenus

The functions in the submenus are displayed in a list form (example to the right).

To access a function:


- ▶ Scroll to the function with the control key  and press **OK**.

Press the display key **Back** or the end call key  **briefly** to return to the previous menu level or to cancel the operation.



Reverting to idle status

You can revert to idle status from anywhere in the menu as follows:

- ▶ Press and **hold** the end call key .

Or:

- ▶ Do not press any key: after 2 minutes the display will **automatically** revert to idle status.

Settings that are not confirmed by pressing the display keys **OK**, **Yes**, **Save** or **Change** will be lost.

An example of the display in idle status is shown on page 14.

Activating/deactivating the handset



With the phone in idle status, press and **hold** the end call key (confirmation tone) to switch off the handset.
Press and **hold** the end call key again to switch the handset on.

Please note


When switching on, an animation of a clock will be displayed for several seconds.

Activating/deactivating the keypad lock

The keypad lock prevents any inadvertent use of the phone.



Press and **hold** the hash key to activate or deactivate the keypad lock. You will hear the confirmation tone.

When the keypad lock is activated you will see the icon  in the display and a message when you press a key.

The keypad lock is deactivated automatically if someone calls you. It is reactivated when the call is finished.

Illustration of operating steps in the user guide


The operating steps are shown in abbreviated form.


Example:

The illustration:


 → Settings → Telephony → Auto Answer (☑ = on)

means:




- ▶ Press **right** on the control key  to open the main menu.



- ▶ Using the control keys, navigate right, left, up and down  until the submenu Settings is selected.

- ▶ Press the display key **OK** to confirm your selection.



- ▶ Press the bottom of the control key  until the menu item Telephony appears on the display.

- ▶ Press the display key **OK** to confirm your selection.



The Auto Answer function is already selected.


- ▶ Press the display key **Change** to activate/deactivate the function.




The change is immediately effective and does not need to be confirmed.


- ▶ Press the key below **Back** on the display screen to return to the previous menu level.

or

Press and **hold** the end call key  to return to idle status.


Menu tree

With the telephone in **idle status**, press  (open main menu):

 **Select Services** (Menu dependent on base station)


 **Bluetooth**


Activation	→ page 38
Search for Headset	→ page 38
Search for DataDevice	→ page 38
Known Devices	→ page 38
Own Device	→ page 39


 **Additional Features**

Room Monitor	→ page 36
--------------	-----------

 **Call Lists** → page 29

 **SMS** (Menu dependent on base station)

 **Answering Machine** (Menu dependent on base station)

 **Organizer**

Calendar	→ page 33
Alarm Clock	→ page 35
Missed Alarms	→ page 35



 **Settings**

Date/Time	→ page 12	
Audio Settings	Handset Volume	→ page 41
	Ringer Settings	→ page 42
	Advisory Tones	→ page 43
	Music on hold	(dependent on base station)
Display	Screensaver	→ page 40
	Backlight	→ page 41
Language	→ page 40	
Registration	→ page 9 (Submenu dependent on base station)	
Telephony	(Submenu dependent on base station)	
System	(Submenu dependent on base station)	
Reset	→ page 43 (Submenu dependent on base station)	




Making calls


Making an external call

External calls are calls using the public telephone network.

  Enter the number and press the talk key.

Or:

  Press and **hold** the talk key  and then enter the number.

You can cancel the dialling operation with the end call key .

You are shown the duration of the call while the call is in progress.

Please note

Dialling using the directory, the call-by-call list (page 1, page 25) or the calls and last number redial list (page 29/ page 29) saves you from having to re-enter numbers and network provider prefixes ("call-by-call numbers").

Continuing a call on a Bluetooth headset

Precondition: Bluetooth is activated; a connection has been established between the Bluetooth headset and the handset (→ page 38).

Press the talk key on the Bluetooth headset; it may take up to 5 seconds to establish a connection to the handset.


For further details about your headset, see the user guide issued with it.

Ending a call





Press the end call key.

Accepting a call

The handset indicates an incoming call in three ways: by ringing, by a display on the screen and by the flashing handsfree key .

You can accept the call by:

- ▶ Pressing the talk key .
- ▶ Pressing the handsfree key .

If the handset is in the charging cradle and the **Auto Answer** function is activated (→ page 41), the handset will take a call automatically when you lift it out of the cradle.

To deactivate the ring tone, press the **Silence** display key. You can take the call as long as it is displayed on the screen.

Accepting a call on a Bluetooth headset

Precondition: Bluetooth is activated; a connection has been established between the Bluetooth headset and the handset (→ page 38).

Only press the talk key on the headset when the headset rings; it can take up to 5 seconds.



For further details about your headset, see the user guide issued with it.

Handsfree talking

In handsfree mode, instead of holding the handset to your ear you can put it down, for example on the table in front of you. This allows others to participate in the call.


Activating/deactivating handsfree mode

Activating while dialling

  Enter the number and press the handsfree key.



- ▶ You should inform your caller before you use the handsfree function so that they know someone else is listening.

Switching between earpiece and handsfree mode

 Press the handsfree key.

Activate/deactivate handsfree during a call.

If you wish to place the handset in the charging cradle during a call:

- ▶ Press and hold the handsfree key  while placing the handset in the base station. If handsfree key  does not light up, press the key again.

For instructions on how to adjust the loudspeaker volume, → page 41.

Switch to mute

You can deactivate the microphone in your handset during an external call.



Mute Press the display key to mute the handset. The display shows *Microphone is off*.

Mute off Press the display key to reactivate the microphone.




Making internal calls

Internal calls to other handsets registered on the same base station are free.



Calling a specific handset



 Initiate internal call.
 Enter the number of the handset.

Or:

 Initiate internal call.
 Select handset.
 Press the talk key.


Calling all handsets ("group call")

 Initiate internal call.
 Press the star key.
or

Call All  Select menu option and
 Press the talk key.

All handsets are called.

Ending a call

 Press the end call key.

Using the directory and lists

The options are:

- ◆ Directory
- ◆ Call-by-call list
- ◆ Last number redial list
- ◆ Call lists
- ◆ List of missed appointments

You create the directory and call-by-call list for your own individual handset. You can also send lists/entries to other handsets (→ page 27).

Directory/call-by-call list

You can save a total of 500 entries in the directory and call-by-call list.


Please note

For quick access to a number from the directory or the call-by-call list (quick dial), you can assign the number to a key (→ page 39).

Directory

In the **directory**, you can save

- ◆ Up to three numbers and associated first names and surnames,
- ◆ e-mail address,
- ◆ anniversaries with reminder,
- ◆ VIP ring tone with VIP symbol.

You open the directory in idle status using the  key.

Length of the entries


3 numbers: each max. 32 digits

First name and surname:
each max. 16 characters

E-mail address: max. 60 characters

Call-by-call list

The **call-by-call list** is used to store the access codes for network providers ("Call-by-call numbers").


- ▶ Open the call-by-call list in idle status by pressing the  key.

Length of the entries

Number: max. 32 digits

Name: max. 16 characters

Storing a number in the directory

 → New Entry

- ▶ Change multiple line input:




First Name: / Surname :

Enter a name in at least one of the fields.

(Instructions on entering text and special characters can be found on page 47.)

Phone (Home): / Phone (Office): /
Phone (Mobile):

Enter a number in at least one of the fields.

When scrolling through the directory, the entries are indicated by a preceding symbol :  /  / .

E-Mail:

Enter e-mail address.

Anniversary:


Select On or Off.

When setting On: Enter Anniversary (Date) and Anniversary (Time) and select reminder type: Anniversary (Signal)

→ page 28.

Caller Melody (VIP) :

You can mark a directory entry as a **VIP** (Very Important Person) by assigning a specific ring tone to it. VIP calls can be recognised by the ring tone.

When scrolling through the directory, VIP entries are indicated by the symbol .

Precondition: Calling Line Identification.

 Save

Press the display key.

Storing a number in the call-by-call list

 → New Entry

▶ Change multiple line input:

Name :

Enter name.

Number:

Enter the number.

Save Press the display key.

Order of directory entries



Directory entries are generally sorted alphabetically by surname. Spaces and digits take first priority. If only the first name was entered in the directory, this is incorporated into the sort order instead of the surname.

The sort order is as follows:



1. Space
2. Digits (0–9)
3. Letters (alphabetical)
4. Other characters

To get round the alphabetical order of the entries, insert a space or a digit in front of the first letter of the surname. These entries will then move to the beginning of the directory.

Selecting entries in the directory and call-by-call list


 /  Open the directory or call-by-call list.

You have the following options:

- ◆ Use  to scroll through the entries until the required name is selected.
- ◆ Enter the first letter in the name (max. 8) or use  to scroll to the entry. The surname is searched for in the directory. Where no surname is entered, the first name is used.

Dialling with the directory/call-by-call list

 /  →  (select entry)

 Press the talk key. The number is dialled.


Managing directory/call-by-call entries

Viewing entries


 /  →  (select entry)

View Press the display key. The entry is displayed.

Options Press the display key.

The following functions can be selected with :

Display Number

To edit or add to a saved number, or to save it as a new entry, press  after the number is displayed.

Delete Entry

Delete selected entry.

Copy Entry

to Internal: Send a single entry to a handset (→ page 27).

vCard via SMS: Send a single entry in vCard format via SMS (dependent on base station).

vCard via Bluetooth: Send a single entry in vCard format via Bluetooth.

Editing entries

 /  →  (select entry)


View Edit Press display keys one after the other.

▶ Carry out changes and save.



Using other functions

 /  →  (select entry)

→ **Options** (open menu)

The following functions can be selected with :

Display Number

Edit or modify a saved number and then dial with  or save as a new entry; to do so, press  after the number appears on the display.

Edit Entry

Edit selected entry.

Delete Entry

Delete selected entry.

Copy Entry

to Internal: Send a single entry to a handset (→ page 27).

vCard via SMS: Send a single entry in vCard format via SMS (dependent on base station).

vCard via Bluetooth: Send a single entry in vCard format via Bluetooth.

Delete All

Delete **all** entries in the directory/call-by-call list.

Copy All

to Internal: Send the complete list to a handset (→ page 27).

vCard via Bluetooth: Send the complete list in vCard format via Bluetooth.

Available Memory

Display the available entries in the directory and call-by-call list (→ page 25).

Using quick dial keys

- ▶ Press and **hold** the required quick dial key (→ page 39).

Linking call-by-call numbers with one number

You can insert the dialling code of a network provider ahead of the number ("linking").



Open call-by-call list.



Select entry (call-by-call number).



Press the display key.

Display Number

Select and press **OK**.



Enter number or select number from the directory (→ page 28).



Press the talk key. Both numbers are dialled.

Sending the directory/call-by-call list to another handset

Preconditions:

- ◆ The sending and receiving handsets must both be registered to the same base station.
- ◆ The other handset and the base station can send and receive directory entries.



/  →  (select entry)

→ **Options** (open menu) → Copy Entry / Copy All → to Internal



Select the internal number of the receiving handset and press **OK**.

You can transfer several individual entries one after the other by responding **Yes** to the Entry copied - Copy next entry? prompt.



A successful transfer is confirmed by a message and confirmation tone on the receiving handset.

Please note:


- ◆ Entries with identical numbers are not overwritten on the receiving handset.
- ◆ The transfer is cancelled if the phone rings or if the memory of the receiving handset is full.
- ◆ Entered anniversary reminders, pictures and sounds are not sent.

Transferring the directory as a vCard with Bluetooth

In Bluetooth mode (→ page 38), you can transfer directory entries in vCard format, e.g. to exchange entries with your mobile phone.

 →  (Select entry) → **Options**
(Open menu) → Copy Entry / Copy All
→ vCard via Bluetooth


The list of "Known Devices" (→ page 38) is displayed.

 Select device and press **OK**.

Receiving a vCard with Bluetooth

Where a device sends a vCard to your handset from the "Known Devices" (→ page 38) list, this process takes place automatically. You will be informed via the display.

If the sending device does not appear in the list, you will be asked on the display to enter the device PIN for the sending device:

 Enter the PIN for the **sending** Bluetooth device and press **OK**.

The transferred vCard is available as a directory entry.

Copying a displayed number to the directory

Numbers displayed in a list, e.g. the calls list or the last number redial list, or during a call can be copied to the directory.



A number is displayed:


Options → Copy to Directory

▶ Complete the entry → page 25.

Copying a number or e-mail address from the directory

In some operating situations you can open the directory, for example to copy a number or e-mail address. Your handset need not be in idle status.



▶ Depending on the operating situation, open the directory with  or .

 Select entry (→ page 26).


Saving an anniversary in the directory


For each number in the directory, you can save an anniversary and specify a time at which a reminder call should be made on the anniversary (default setting: Anniversary: Off).

Anniversaries are automatically recorded in the calendar (→ page 33).

 →  (Select entry)

View **Edit** Press display keys one after the other.

 Scroll to the Anniversary: line.

 Select On.

▶ Change multiple line input:

Anniversary (Date)

Enter day/month/year in 8-digit format.

Anniversary (Time)

Enter the hour/minute for the reminder call in 4-digit format.

Anniversary (Signal)



Select the type of signal for the reminder.

Save Press the display key.


Please note


A time must be specified for reminder calls. If you select a visual signal, a time is not required and is automatically set to 00.00.

Deactivating anniversaries

 →  (Select entry)

View **Edit** Press display keys one after the other.

 Scroll to the Anniversary: line.

 Select Off.

Save Press the display key.

Reminder call on an anniversary

In **idle status**, a reminder call is signalled in the handset display (→ page 2) and with the selected ring tone.

You can:

Off Press the display key to acknowledge and end the reminder call.


While you are making calls a reminder call is signalled **once** via an advisory tone to the handset.


Anniversaries that have not been acknowledged and that are signalled during a call are entered in the **Missed Alarms** list (→ page 35).


Last number redial list

The last number redial list contains the twenty numbers last dialled with the handset (max. 32 digits). If a number is in the directory or the call-by-call list, then the appropriate name will be displayed.

Manual last number redial


 Press the key **briefly**.


 Select entry.

 Press the talk key again. The number is dialled.


When a name is displayed, you can display the corresponding phone number by pressing the display key **View**.

Managing entries in the last number redial list

 Press the key **briefly**.

 Select entry.

Options Open menu.


The following functions can be selected with :

Copy to Directory

Copy an entry to the directory (page 25).

Automatic Redial

The selected number is automatically dialled at fixed intervals (at least every 20 seconds). The handsfree key flashes and "open listening" is activated.

- Party answers: press the Talk key . The function is ended.
- Party does not answer: the call is terminated after approx. 30 seconds. The function is ended after pressing any key or after ten unsuccessful attempts.

Display Number (as in the directory, page 27)

Delete Entry (as in the directory, page 27)

Delete All (as in the directory, page 27)

Call lists



Precondition: Calling Line Identification (CLIP).

Your telephone saves different types of calls, depending on the base station:

- ◆ Answered calls
- ◆ Outgoing calls
- ◆ Missed calls

You can display each type of call individually or have an overall view of all calls. The last 20 entries in each case are displayed.

In idle mode, you can open the call lists using the display key **Calls** or via the menu:

 → 

List entry

New messages are displayed at the top.

Example of list entries:



- ◆ List type (in header)
- ◆ Status of entry
 - Bold:** New entry
- ◆ Number or name of caller
- ◆ Date and time of call (if set, page 12)
- ◆ Type of entry:
 - Accepted calls (📞)
 - Missed calls (📞x)
 - Outgoing calls (📞→)

Press the display key **View** to display additional information, for example the number corresponding to a name.

Press the display key **Options** to select the following functions:

Copy to Directory

Copying a displayed number to the directory.

Delete Entry


Delete selected entry.

Delete All


Delete all entries.




When you quit the call lists, all entries are set to the status "old", i.e. the next time you call the list up they will no longer be shown in bold.

Opening lists with the message key

You can use the message key  to open the following list selection:

- ◆ Network mailbox, if your network provider supports this function and fast access is set for the network mailbox (→ page 32)
- ◆ List of missed calls
- ◆ List of missed appointments (→ page 35)

An advisory tone sounds as soon as a **new message** arrives in a list. The  key flashes (it goes off when the key is pressed). In **idle status**, the display shows an icon for the new message:

Icon	New message...
	... on the (network) mailbox
	... in the missed calls list
	... in the Missed Alarms list


The number of new entries is displayed on the right next to the corresponding symbol.




Please note

If calls are saved in the network mailbox, you will receive a message if the appropriate settings have been made (see your network provider user guide).

List selection

The lists displayed after pressing the message key  depend on whether there are any new messages.

◆  **key does not flash**

(no new messages):


You will see all the lists containing messages and the network mailbox.

◆  **key flashes**

(new messages received):

You will see all the lists with **new** messages. If only one list contains new messages, this will be opened automatically.

Lists with new messages appear at the top and are indicated by a bold font:



Select a list with . To open, press **OK**.

Using the network mailbox

The network mailbox is your network provider's answering machine within the network. You cannot use the network mailbox unless you have **requested** it from your network provider.



Configuring fast access for the network mailbox

With fast access, you can dial the network mailbox directly.

Fast access is set for the network mailbox. You only need to enter the number of the network mailbox.

Configuring fast access for the network mailbox and entering the network mailbox number

For base stations **with** answering machines:

 →  → Set Key 1


Network Mailbox

Select and press **Select**
(● = selected).

For base stations **without** answering machines:

 →  → Network Mailbox

To continue:

 Enter the number for the network mailbox.

Save Press the display key.


The setting for fast access applies to all Gigaset SL78H handsets.

Calling the network mailbox



Press and **hold**. You are connected straight to the network mailbox.



Press handsfree key  if required. You will hear the network mailbox announcement.

Viewing the network mailbox report

When a message is recorded, you receive a call from the network mailbox. If you have requested Calling Line Identification, the network mailbox number will be displayed. If you take the call, the new messages are played back. If you do not take the call, the network mailbox number will be saved in the missed calls list and the message key flashes (→ page 30).

ECO DECT

You are helping to protect the environment with your Gigaset SL78H.

Reduced energy consumption

Your telephone has a power-saving adapter plug and uses less power.

Reduced transmission power (depending on the base station)

The transmission power can only be reduced if your base station supports this function.

The transmission power of your telephone is **automatically** reduced, based on the distance between the handset and the base station.

You can reduce the transmission power of the handset and base station even further by using Eco Mode or Eco Mode+. For further information, please see your phone's user guide.

Setting an appointment (calendar)

You can use your handset to remind yourself of up to 30 appointments.

Anniversaries (→ page 28) entered in the directory are automatically recorded in the calendar.



You can set whether or not the graphic calendar is to be displayed in idle status. To do this from idle status:


Calendar → **Options** → Show Cal. in Idle
(☑ = display)

Press **Change** to activate/deactivate the function (☑ = on).



Saving an appointment

Precondition: The date and time have already been set (→ page 12).


 →  → **Calendar**



- ◆ The current day is highlighted in orange.
- ◆ Days on which appointments have already been saved are highlighted in orange.

 /  Select the required day in the graphic calendar.

The selected day is highlighted in orange. Highlighting of the current day changes to white.

 Press the middle of the control key.

- ◆ If appointments have already been entered, this will open the list of saved appointments for the day.
Use <New Entry> → **OK** to open the window for data input.
- ◆ If no appointments have been entered, the data entry window will open immediately to add the new appointment.
- ▶ Change multiple line input:

Appointment :

Select On or Off.

Date:

Enter day/month/year in 8-digit format.

Time:

Enter hours/minutes in 4-digit format.

Setting an appointment (calendar)

Text :

Enter text (max. of 16 characters). The text appears as the appointment name in the list and will be displayed on the screen during the appointment reminder. If you do not enter any text, only the date and time of the appointment are displayed.


Save Press the display key.

Please note

If you have already saved 30 appointments, you must delete an existing appointment before you can enter a new one.

Signalling of appointments and anniversaries

In idle status, an appointment reminder will be signalled for 60 seconds using the selected ring tone (→ page 41). The entered text, date and time are displayed.



You can either answer the appointment reminder or switch it off (depending on the base station):

Off Press the display key to deactivate the appointment reminder.



Or (depending on the base station):




SMS Press the display key to accept the appointment reminder with an SMS.


Please note

During a call, the appointment reminder is signalled by a short tone.

Managing appointments

 →  → Calendar

 /  Select the day in the graphic calendar and press the  control key. (Days on which appointments have already been saved are highlighted in orange in the calendar).

 Select appointment for the day.

Options Open menu

You have the following options:

View Entry

View selected appointment.
Open the **Options** menu for editing, deleting and activating/deactivating.

Edit Entry

Edit selected appointment.

Delete Entry

Delete selected appointment.

Activate / Deactivate

Activate/deactivate the selected appointment.


Delete all


Delete **all** appointments.



Displaying missed appointments, anniversaries

Missed appointments/anniversaries (→ page 28) are displayed in the **Missed Alarms** list if:

- ◆ You do not accept an appointment/anniversary.
- ◆ The appointment/anniversary was signalled during a phone call.
- ◆ The handset is deactivated at the time of the appointment/anniversary.

The symbol  and the number of **new** entries are indicated in the display. The most recent entry is at the head of the list.

Open the list by pressing the **message key**  (→ page 30) or via the **menu**:

 →  → Missed Alarms

Select appointment/anniversary.

Information about the appointment/anniversary is displayed. A missed appointment is displayed with the appointment name and a missed anniversary is displayed with the last name and first name. The date and time will also be given.

Delete

Delete appointment

SMS

Write an SMS (depending on base station).

If 10 entries are already stored in the list, the next appointment reminder will delete the oldest entry.

Setting the alarm clock

Precondition: The date and time have already been set (→ page 12).

Activating/deactivating the alarm clock and setting the wake-up time

 →  → Alarm Clock

▶ Change multiple line input:

Activation:

Select On or Off.

Time:

Enter the wake-up time in 4-digit format.

Occurrence:

Select Daily or Monday-Friday.

Volume:


Set the volume (1–6).

Melody:

Select melody.

Save

Press the display key.

The  symbol and wake-up time are displayed in idle status.

A wake-up call with the selected ring tone is signalled on the handset (→ page 2). The wake-up call sounds for 60 seconds. If no key is pressed, the wake-up call is repeated twice at five minute intervals and then turned off.

During a call, the wake-up call is only signalled by a short tone.

Deactivating the wake-up call/ repeating after a pause (snooze mode)

Precondition: A wake-up call is sounding.

Off

Press the display key. The wake-up call is deactivated.

or

Snooze

Press the display key or any key. The wake-up call is deactivated and then repeated after 5 minutes. After the second repetition the wake-up call is deactivated completely.

Using a handset as a room monitor

If the room monitor is activated, a previously saved destination number is called as soon as a set noise level is reached. You can save an internal or external number in your handset as the destination number. All of the handset keys are deactivated, with the exception of the display keys.

The room monitor call to an external number stops after around 90 seconds. The room monitor call to an internal number (handset) stops after approx. 3 minutes (depending on the base station). When the room monitor is activated, all keys are locked except the end call key. The handset's speaker is muted.

When the room monitor is activated, incoming calls to the handset are indicated **without a ring tone** and are only shown on the screen. The display and keypad are not illuminated and advisory tones are also turned off.



If you accept an incoming call, the room monitor is suspended for the duration of the call, but the function **remains** activated.

If you deactivate then reactivate the handset, the room monitor remains activated.

Warning!

- ◆ You should always check the operation of the room monitor before use. For example, test its sensitivity. Check the connection if you are diverting the room monitor to an outside number.
- ◆ When the function is switched on, the handset's operating time is considerably reduced. If necessary, place the handset in the charging cradle. This ensures that the battery does not run down.
- ◆ Ideally the handset should be positioned 1 to 2 metres away from the baby. The microphone must be directed towards the baby.
- ◆ The connection to which the room monitor is forwarded must not be blocked by an activated answer machine.

Activating the room monitor and entering the destination number

 →  → Room Monitor


- ▶ Change multiple line input:

Activation:

Select On to activate.

Alarm to:

Select Internal or External.

External number: Select the number from the directory (press display key ) or enter it directly.

Internal number: Press the **Change** display key → select handset or **Call All**, if all registered handsets are to be called → **OK**.


The destination number or the internal destination number is displayed in the idle display.

Sensitivity:

Select noise level sensitivity (Low or High).

- ▶ Press **Save** to save the settings.

When the room monitor is activated, the idle display appears as follows:



Changing the set destination number

→ → Room Monitor

- ▶ Enter and save number as described in "Activating the room monitor and entering the destination number" (→ page 36).

Cancel/deactivate room monitor

Press the end call key to cancel the call when the **room monitor is activated**.

In the idle status press the display key **Off** to deactivate the room monitor mode.

Deactivating the room monitor remotely

Preconditions: The phone must support touch tone dialling and the room monitor should be set for an external destination number.

- ▶ Accept the call from the room monitor and press keys .

The room monitor function will deactivate after the call ends. There will be no further room monitor calls. All other room monitor settings (e.g. no ring tone) on the handset are retained until you press the display key **Off** on the handset.

To reactivate the room function with the same phone number:

- ▶ Turn on the activation again and save with **Save** (→ page 36).

Using Bluetooth devices

Your Gigaset SL78H handset can communicate wirelessly via Bluetooth™ with other devices using this technology.

Before you can use your Bluetooth devices, you must first activate Bluetooth and then register the devices to the handset.

You can register 1 Bluetooth headset to the handset. You can also register up to 5 data devices (PC, PDA) to send and receive directory entries as vCards or exchange data with the computer (→ page 48).

Area codes (international and local area codes) must be saved on the phone to use the numbers again (→ page 43).


You will find a description of how to operate your Bluetooth devices in the user guides for these devices.

Please note

- ◆ You can operate headsets on your handset that have the **headset** or **handsfree profile**. Where both profiles are available, the handsfree profile is used for communication.
- ◆ It can take up to 5 seconds to create a connection between your handset and a Bluetooth headset. This applies both when a call is accepted using the headset or transferred to the headset, and when a number is dialled from the headset.

Activating/deactivating Bluetooth mode

 →  → Activation

Press **Change** to activate or deactivate Bluetooth mode ( = activated).



In idle status, the  icon shows that Bluetooth mode is activated (→ page 2).

Registering Bluetooth devices

The distance between the handset in Bluetooth mode and the activated Bluetooth device (headset or data device) should be no more than 10 m.

Please note

- ◆ If you register a headset, any headset that is already registered will be overwritten.
- ◆ If you would like to use a headset with your handset that is already registered to another device (e.g. to a mobile phone), please **deactivate** this connection before you start the registration process to the Gigaset.

 →  → Search for Headset / Search for DataDevice

The search can take up to 30 seconds.

Once the device has been found, its name will be shown on the display.

Options Press the display key.

Trust Device

Select and press **OK**.



Enter the PIN for the Bluetooth device you want to **register** and press **OK**.

The device is saved in the list of known devices.

Cancelling/repeating current search

To cancel search:

Cancel Press the display key.

Repeat search if necessary:

Options Press the display key.

Repeat Search



Select and press **OK**.


Editing the list of known (trusted) devices

Open list

 →  → Known Devices

A corresponding icon appears next to each device name in the list displayed:

Icon	Meaning
	Bluetooth headset
	Bluetooth data device

If a device is connected, the display header indicates the corresponding symbol instead of .

Viewing entries

Open list →  (select entry)

Options Press the display key.

View Entry Select and press **OK**.
Device name and address are displayed.
Back with **OK**.

Deregistering Bluetooth devices

Open list →  (select entry)

Options Press the display key.

Delete Entry Select and press **OK**.

Please note

If you deregister an activated Bluetooth device, it may try to reconnect as an "unregistered device".

Changing the name of a Bluetooth device

Open list →  (select entry)

Options Press the display key.

Edit Name Select and press **OK**.



Change the name.

Save Press the display key

Rejecting/accepting an unregistered Bluetooth device

If a Bluetooth device that is not registered in the list of known devices tries to connect with the handset, you will be prompted on the display to enter the PIN for the Bluetooth device (bonding).

◆ Reject

Back Press the display key.

◆ Accept



Enter the PIN for the Bluetooth device you want to **accept** and press **OK**.

If you have accepted the device, you can use it temporarily (i.e. as long as it is within receiving range or until you deactivate the handset) or save it to the list of known devices.

Once the PIN has been confirmed, save to the list of known devices:

- **Yes** Press the display key.
- **No** Press the display key: use temporarily.

Changing the Bluetooth name of the handset

You can change the handset name used to identify it on the display of another Bluetooth device.

 →  → Own Device

Change Press the display key






Change the name.

Save Press the display key

Handset settings

Your handset is preconfigured, but you can change the settings to suit your individual requirements.

Quick access to functions and numbers

You can assign a number or a function to each of the digit keys  and  to .

The left and right display keys have functions pre-selected by default. You can change the assignment (→ page 40).

The number is then dialled or the function started by simply pressing a key.

Assigning digit keys

Precondition: You have not yet assigned a number or function to the digit key.

▶ **Press and hold** the digit key.

The list of possible key assignments is opened. The following can be selected:

Quick Dial / Call-by-Call

Assign key to a number from the directory or call-by-call list.

The directory or call-by-call list is opened.

▶ Select an entry and press **OK**.

If you delete or edit an entry in the directory or call-by-call list, this has no effect on the assignment to the digit/display key.

Room Monitor

Assign menu for setting and activating the room monitor to a key (→ page 36).

Alarm Clock

Assign menu for setting and activating the alarm clock to a key (→ page 35).

Calendar

Open calendar/enter new appointment.

Handset settings

Bluetooth

Assign the Bluetooth menu to a key.

Redial

Display the last number redial list.

More Functions...

Depending on your base station, further key assignments are also possible.

Starting the function, dialling the number

Press and **hold** the digit key in the idle status of the handset, or **briefly** press the display key.

Depending on the key assignment:

- ◆ Numbers are dialled directly.
- ◆ The function menu is opened.

Changing key assignments

Display key

- ▶ Press and **hold** the left or right display key.

The list of possible key assignments is opened.

- ▶ Proceed as described when assigning functions to the digit keys (→ page 39).

The selected function or name of the phone number in the directory or call-by-call list is displayed (abbreviated if necessary) in the bottom display line above the display key.

Digit key



- ▶ **Briefly** press the digit key.


Change Press the display key. The list of possible key assignments is displayed.

- ▶ Proceed as is described when first assigning the key (→ page 39).

Changing the display language

You can view the display texts in different languages.

 →  → Language


The current language is indicated by a .

 Select language and press **Select**.

If you accidentally choose a language you do not understand:

 →  →  →  → 

Press the keys one after the other and confirm using **OK**.


 Select the correct language and press **Select**.

Setting the display

Setting the screensaver

In idle status, you can display the time as a screensaver. This will replace the idle status display and it may conceal the calendar, date, time and name.

The screensaver is not displayed in certain situations, e.g. during a call or if the handset is deregistered.

If a screensaver is activated, the menu option Screensaver is marked with .

 →  → Display → Screensaver

The current setting is displayed.

- ▶ Change multiple line input:


Activation:

Select **On** (screensaver is displayed) or **Off** (no screensaver).


Selection :

Select screensaver **or**

View press the display key. The active screensaver is displayed.

 Select screensaver and press **OK**.

Save Press the display key.

If the screensaver covers the display, **briefly press**  to show the idle display.

Setting the display backlight

Depending on whether or not the handset is in the charging cradle, you can activate or deactivate the backlight. If it is activated, the display is permanently dimmed.

 →  → Display → Backlight

The current setting is displayed.

► Change multiple line input:

In Charger

Select On or Off.

Out of Charger


Select On or Off.

Please note


With the On setting, the standby time of the handset can be significantly reduced.

Save Press the display key.

Activating/deactivating auto answer

If you activate this function, when you receive a call you can simply lift the handset out of the charging cradle without having to press the talk key .

 →  → Telephony → Auto Answer


Change Press the display key ( = on).

Changing the handsfree/earpiece volume

You can set the loudspeaker volume for handsfree talking and the earpiece volume to five different levels.

In idle status:

 → Handset Volume

 Set the earpiece volume.



Scroll to the **Speaker** line.



Set the handsfree volume.

Save

Press display key if necessary to save the setting permanently.

Setting the volume during a call:




Press the control key.



Select volume.

The setting will automatically be saved after approx. 3 seconds, if not then press the display key **Save**.

If  is assigned to another function, e.g. toggling:

Options Open menu.

Volume Select and press **OK**.



Configure setting (see above).

Please note

You can also set the call volume, the ring tones and the advisory tones via the menu (→ page 22).

Changing ring tones

◆ **Volume:**

You can choose between five volumes (1–5; e.g. volume 3 = ) and the "crescendo" ring (6; volume increases with each ring = .

◆ **Ring tones:**

You can select a pre-installed ring tone from a list.

You can set different ring tones for the following functions:

◆ **External Calls:** for external calls

◆ **Internal Calls:** for internal calls






◆ **Appointments:** for set appointments (→ page 33)

◆ **All:** the same ring tone for all functions

Settings for individual functions

Set the volume and melody depending on the type of signalling required.

In idle status:

-  → Ringer Settings
-  Select setting, e.g. External Calls, and press **OK**.
-  Set volume (1–6).
-  Scroll to the next line.
-  Select melody.
- Save** Press the display key to save the setting.

Additionally for external calls:

After entering a ring tone, you can select a period of time during which your telephone is not to ring, e.g. at night.

Time Control:
Select On or Off.

Mute ring tone from:
Enter the start of the period in 4-digit format.


Mute ring tone until:
Enter the end of the period in 4-digit format.

Please note

Your telephone will ring during this time period for callers to whom you have assigned your own melody in the directory (VIP).

Same ring tone for all functions

In idle status:

-  → Ringer Settings → All
- ▶ Set volume and ring tone (see "Settings for individual functions").
- Save** Press the display key.

Yes Confirm the prompt to save your settings.



Please note

You can also set the call volume, the ring tones and the advisory tones via the menu (→ page 22).


Activating/deactivating the ring tone

You can deactivate the ring tone on your handset before you answer a call or when the handset is in idle status; the ring tone can be deactivated permanently or only for the current call. The ring tone cannot be re-activated while an external call is in progress.

Deactivating the ring tone permanently

 Press and **hold** the star key. The  icon appears in the display.

Reactivating the ring tone


 Press and **hold** the star key.


Deactivating the ring tone for the current call

Silence Press the display key.

Activating/deactivating the alert tone

In place of the ring tone you can activate an alert tone. When you get a call, you will hear a **short tone** ("Beep") instead of the ring tone.

 Press and **hold** the star key and **within 3 seconds**:

Beep Press the display key. A call will now be signalled by **one** short alert tone. The  icon appears in the display.

Activating/deactivating advisory tones

Your handset uses advisory tones to tell you about different activities and statuses. The following advisory tones can be activated/deactivated independently of each other:

- ◆ **Key click:** every key press is confirmed.
- ◆ **Acknowledge tones:**
 - **Confirmation tone** (ascending tone sequence): at the end of an entry/setting and when a new entry arrives in the call list
 - **Error tone** (descending tone sequence): when you make an incorrect entry
 - **Menu end tone:** when scrolling to the end of a menu
- ◆ **Battery low beep:** the battery requires charging.

In idle status:

 → Advisory Tones

▶ Change multiple line input:

Key Tones:


Select On or Off.

Confirmation:

Select On or Off.

Battery:

Select On, Off or In Call. The battery warning tone is only activated/deactivated and only sounds during a call.

 Press the display key.

Please note

You can also set the call volume, the ring tones and the advisory tones via the menu (→ page 22).

Setting your own area code

In order to transfer phone numbers (e.g. in vCards), it is essential that your area code (international and local area code) is saved on the phone.


Some of these numbers are already pre-set.


 →  → Telephony → Area Codes


Check that the (pre)set area code is correct.


▶ Change multiple line input:

 Select/change input field.


 Navigate in the input field.

 If necessary, delete number: press the display key.

 Enter number.

 Press the display key.

Example:




Restoring the handset default settings

You can reset individual settings and changes that you have made.

The following settings are **not** affected by the reset

- ◆ Registration of the handset to the base station
- ◆ Date and time
- ◆ Calendar entries
- ◆ Entries in the directory, the call-by-call list and the call lists

 →  → Reset → Handset Reset

 Press the display key.

Service (Customer Care)

You can get assistance easily when you have technical questions or questions about how to use your device by using our online support service on the Internet at:

www.gigaset.com/customer-care

This site can be accessed at any time wherever you are. It will give you 24/7 support for all our products. It also a list of FAQs and answers plus user guides for you to download. You will also find frequently asked questions and answers in the **Questions and Answers** section of this user guide in the appendix.

If the device needs to be repaired, please contact one of our Customer Care Centers:

Abu Dhabi.....	97 12 62 23 800	Jordan	00962 6 5625460/1/2
Argentina	0800-888-9878	Kuwait.....	00965-2464993
Australia	1300 665 366	Latvia.....	7 50 11 18
Austria .05 17 07 50 04 (0,065 Euro/Min.)		Lebanon.....	00961-1236110
Bahrain.....	97 31 73 11 173	Luxembourg	40 66 61 56 40
Belgium	0 78 15 66 79	Malaysia.....	603 77124304
Bosnia Herzegovina	033 276 649	Malta	+353 21 4940 632
Brazil.....		Mexico..	01800 999 4442738 (01800 999 Gigaset)
Grande Capitais e Regiões Metropolitanas:		Netherlands	
.....	4003 3020	0900-3333102 (0,25 Euro/min.)
Demais localidades:.....	0800 888 3020	New Zealand	08 00 27 43 63
.....	R\$ 0,14 (US\$ 0,069)	Norway	22 70 84 00
.....	0800 888 3020	Oman.....	96 82 47 09 281
.....	R\$ 0,20 (US\$ 0,098)	Poland	0 801 140 160
Bulgaria.....	02 873 94 88	Portugal.....	(351) 808 781 223
Canada	866 247 8758	Romania	+4.021.529.7114.
China ...	0 21 400 670 6007 (RMB 0.11)	Russia.....	8 (495) 228 1312
Croatia	01 / 2456 555 (0,23 Kn)	Serbia.....	0800 222 111
Czech Republic.....	233 032 727	Singapore	6735 9100
Denmark.....	35 25 86 00	Slovak Republic	
Dubai	97 14 39 69 944	02 59 68 22 66 (4,428 sk)
Egypt.....	202 7623441	Slovenija	0 14 74 63 36
Finland	09 23 11 34 25	South Africa.....	08 60 10 11 57
France... 01 56 38 42 00 (Appel national)		Spain	902 103935
Germany.....	01805 333 222	Sweden	08 750 99 11
(0,14 Euro/Min. aus dem Festnetz der Deutschen Telekom.		Switzerland	
Für Anrufe aus den Mobilfunknetzen können abweichende Preise gelten)		0848 212 000 (0,08 SFr./Min.)
Greece	801 1000 500 (0,026 Euro)	Taiwan	02 266 24343
Hong Kong	2763 0203	Thailand.....	02 722 1118
.....	2389 7285	Turkey	0216 459 98 59
Hungary	06 14 71 24 44 (27 Ft)	Ukraine	+380-44-451-71-72
India	Please refer to your	United Arab Emirates	0 43 66 03 86
.....	local warranty card	United Kingdom	0 84 53 67 08 12
Ireland	18 50 77 72 77	USA	1-866 247-8758
Israel.....	1 700 700 727	(toll free)
Italy.....	199.15.11.15	Vietnam.....	1900 545 416

Please have your record of purchase ready when calling.

Replacement or repair services are not offered in countries where our product is not sold by authorised dealers.


Questions and answers

If you have any questions about using your phone, visit us at www.gigaset.com/customercare at any time. The table below contains a list of common problems and possible solutions.

Registration or connection problems with a Bluetooth headset.

- ▶ Reset the Bluetooth headset (see the user guide for your headset).
- ▶ Delete registration data from the handset when deregistering the device (→ page 38).
- ▶ Repeat the registration process (→ page 38).

The display is blank.

1. The handset is not switched on.
 - ▶ Press and **hold** the end call key .
2. The battery is flat.
 - ▶ Charge the battery or replace it (→ page 8).

No Base flashes in the display.

1. The handset is outside the range of the base station.
 - ▶ Move the handset closer to the base station.

The base station's range is reduced because eco mode is activated.

 - ▶ Deactivate eco mode (→ page 33) or reduce the distance between the handset and the base station.
2. The base station is not turned on.
 - ▶ Check the base station mains adapter.

"Please register handset" flashes in the display.

Handset has not yet been registered to the base station or has been de-registered.

- ▶ Register the handset (→ page 9).

Handset does not ring.

The ring tone is deactivated.

- ▶ Activate the ring tone (→ page 42).

The other party cannot hear you.

You have pressed the **Mute** display key. The handset is "muted".

- ▶ Activate the microphone again (→ page 24).

You will hear an error tone when inputting (descending tone sequence).

Action has failed/invalid input.

- ▶ Repeat the operation. Watch the display and refer to the user guide if necessary.

Authorisation

This device is intended for use within the European Economic Area and Switzerland. If used in other countries, it must first be approved nationally in the country in question.

Country-specific requirements have been taken into consideration.

We, Gigaset Communications GmbH, declare that this device meets the essential requirements and other relevant regulations laid down in Directive 1999/5/EC.

A copy of the 1999/5/EC Declaration of Conformity is available at this Internet address:

www.gigaset.com/docs.

 **0682**

Bluetooth  Qualified Design Identity

The Bluetooth QD ID for your Gigaset SL78H is: B013322.

Environment

Our environmental mission statement

We, Gigaset Communications GmbH, carry social responsibility and are actively committed to a better world. Our ideas, technologies and actions serve people, society and the environment. The aim of our global activity is to secure sustainable life resources for humanity. We are committed to a responsibility for our products that comprises their entire life cycle. The environmental impact of products, including their manufacture, procurement, distribution, use, service and disposal, are already evaluated during product and process design.

Further information on environmentally friendly products and processes is available on the Internet under www.gigaset.com.

Environmental management system



Gigaset Communications GmbH is certified pursuant to the international standards EN 14001 and ISO 9001.

ISO 14001 (Environment): certified since September 2007 by TÜV SÜD Management Service GmbH.

ISO 9001 (Quality): certified since 17/02/1994 by TÜV SÜD Management Service GmbH.

Ecological energy consumption

The use of ECO DECT (→ page 33) saves energy and is an active contribution towards protecting the environment.

Disposal

Batteries should not be disposed of in general household waste. Observe the local waste disposal regulations, details of which can be obtained from your local authority or the dealer you purchased the product from.

All electrical and electronic equipment must be disposed of separately from general household waste using the sites designated by local authorities.



If a product displays this symbol of a crossed-out rubbish bin, the product is subject to European Directive 2002/96/EC.

The appropriate disposal and separate collection of used equipment serve to prevent potential harm to the environment and to health. They are a precondition for the re-use and recycling of used electrical and electronic equipment.

For further information on disposing of your used equipment, please contact your local authority, your refuse collection service or the dealer you purchased the product from.

Appendix

Care

- ▶ Wipe the charging cradle and the handset with a **damp** cloth (do not use solvent) or an antistatic cloth.

Never use a dry cloth. This can cause static.

Contact with liquid

If the handset should come into contact with liquid:

1. **Switch the handset off and remove the battery immediately.**
2. Allow the liquid to drain from the handset.
3. Pat all parts dry, then place the handset with the battery compartment open and the keypad facing down in a dry, warm place **for at least 72 hours** (not in a microwave, oven etc.).
4. **Do not switch on the handset again until it is completely dry.**

When it has fully dried out, you will normally be able to use it again.

Specifications

Recommended batteries

Technology: Lithium ion (Li-Ion):

Voltage: 3.7 V

Capacity: 830 mAh

Type: V30145-K1310-X444

The handset is supplied with the recommended battery. Only the original battery may be used.

Due to the constant progression in battery development, the list of recommended batteries in the FAQ section of the Gigaset Customer Care pages is regularly updated:

www.gigaset.com/customer-care






Handset operating times/charging times

The operating time of your Gigaset depends on the capacity and age of the battery, and the way it is used. (All times are maximum possible times and apply when the display backlight is switched off).

Standby time	approx. 200 hours (8 days)
Talktime	approx. 15 hours
Charging time	approx. 3.5 hours

Writing and editing text

The following rules apply when writing text:

- ◆ Control the cursor with    .
- ◆ Characters are inserted to the left of the cursor.
- ◆ Press the star key  to show the table of special characters. Select the required character, press the display key **Insert** to insert the character at the cursor position.
- ◆ The first letter of the name of directory entries is automatically capitalised, followed by lower case letters.

Writing names

Press the relevant key several times to enter the corresponding letters/characters.

If you press and **hold** a key, the corresponding digit will be inserted.

Standard characters

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x
1 oo	1)	2)	1							
2 abc	a	b	c	2	ä	á	à	â	ã	ç
def 3	d	e	f	3	ë	é	è	ê		
4 ghi	g	h	i	4	ï	í	ì	î		
5 jkl	j	k	l	5						
mno 6	m	n	o	6	ö	ñ	ó	ò	ô	õ
pqrs 7	p	q	r	s	7	ß				
tuv 8	t	u	v	8	ü	ú	ù	û		
wxyz 9	w	x	y	z	9	ÿ	ý	æ	ø	å
0 +	.	,	?	!	0					

1) Space

2) Line break

Setting upper/lower case or digits

Press the hash key **[#]** **briefly** to switch from "Abc" mode to "123" and from "123" to "abc" and from "abc" to "Abc" (upper case: 1st letter upper case, all others lower case). Press the hash key **[#]** **before** entering the letter.

You can see in the display whether upper case, lower case or digits is selected.

Additional functions via the PC interface

You can connect the handset to your computer via Bluetooth (→ page 37) or via the USB data cable supplied. If you want to use the Bluetooth connection, your computer must be equipped with a suitable dongle. To be able to communicate via the USB interface, you must install the driver software from the supplied CD before connecting the USB data cable (→ page 14).

The program "**Gigaset QuickSync**" must be installed on your computer for your handset to communicate with your computer (free download from www.qigaset.com/qigasetSL780).

Please note

- ◆ If Bluetooth is activated and the supplied USB data cable is plugged into the connection socket (→ page 14), Bluetooth is automatically deactivated.
 - If a Bluetooth voice connection has already been established, Bluetooth is not deactivated until this connection is deactivated.
 - If a Bluetooth data connection has already been established, the response depends on the receiving device.
- ◆ Bluetooth is automatically reactivated when the USB data cable is removed.
- ◆ If Bluetooth is deactivated and the USB data cable is plugged in, Bluetooth cannot be activated.

Transfer data

You can synchronise your handset directory with Outlook using "**Gigaset QuickSync**" (see program help function).



During the transfer of data between handset and PC, you will see **Data transfer in progress** on the display. During this time the keypad is disabled, and incoming calls will be ignored.

Completing a firmware update

- ▶ Connect your telephone and PC using the **USB data cable** (→ page 14) supplied.
- ▶ Start the "**Gigaset QuickSync**" program on the PC.
- ▶ Set up the connection to the handset.
- ▶ Open the **[Device]** tab via **[Settings] → [Device properties]**
- ▶ Click on **[Firmware update]**

The firmware update starts.

Data is first loaded from the update server via the Internet. The time required for this depends on the speed of your Internet connection.





Your telephone display is switched off, and the messages key  and the handsfree key  flash.

The update procedure can take up to 10 minutes (excluding download time).

Do not interrupt the procedure. Do not remove the USB data cable. Once the update is complete, your telephone automatically restarts.

Procedure in the event of an error

If your telephone no longer functions correctly after an update, repeat the procedure. If it is not possible to establish a connection to the PC, proceed as follows:

- ▶ Remove the USB data cable from the telephone
- ▶ Remove the battery (→ page 9)
- ▶ Press and hold keys  and  at the same time
- ▶ Insert the battery again
- ▶ Connect the USB cable again
- ▶ Release keys  and  at the same time

Proceed as described under "**Completing a firmware update**".

Accessories

Ordering Gigaset products

You can order Gigaset products from your specialist retailer.



Only use original accessories. This will avoid possible health risks and damage to property, and also ensure that all the relevant regulations are complied with.

Index

A

Accessories	49
Acknowledge tones	43
Activating	
advisory tones	43
appointment	33
call acceptance	41
handset	19
keypad lock	19
room monitor	36
Advisory tones	43
Alarm clock	35
Alert tone	42
Anniversary	28
deactivating	29
display missed	35
missed	35
saving in directory	28
Appointments	33
activating/deactivating	34
deleting	34
display missed	35
managing	34
Area code	
setting own area code	43
Assigning a number key	39
Authorisation	45
Auto answer	23, 41
Automatic	
last number redial	29

B

Battery	
charging	1, 2, 11
display	1, 2
icon	1, 2, 14
inserting	8
recommended batteries	47
tone	43
Birthday, see Anniversary	
Bluetooth	
accepting a call	23
activating	38
changing device name	39
deregistering devices	38

list of known devices	38
registering devices	38
setting own area code	43
transferring directory (vCard)	28

C

Calendar	33
Call	
accepting	23
accepting (Bluetooth)	23
ending	23
external	23
internal	24
length	23
list	29
Call acceptance	41
Call-by-call	25
numbers	25, 27
Call-by-call list key	1
Calling	
external	23
internal	24
Care of the telephone	47
Changing	
destination number	37
device name (Bluetooth)	39
display language	40
earpiece volume	41
handsfree volume	41
ring tone	41
Character set	48
Charge status display	1, 2
Confirmation tone	43
Control key	1, 16
Correcting incorrect entries	17
Customer Care	44

D

Deactivating	
advisory tones	43
appointment	33
call acceptance	41
handset	19
keypad lock	19
room monitor	37
Delete key	17
Deleting characters	17
Deregistering devices (Bluetooth)	38

- Destination number (room monitor) . . . 36
- Dialling
 - call-by-call list 26
 - directory 26
 - quick dial 39
 - using quick dial keys 27
- Directory 25
 - copying number from text 28
 - managing entries 26
 - opening 16
 - order of entries 26
 - saving anniversary 28
 - saving entry 25
 - sending entry/list to handset 27
 - transferring a vCard (Bluetooth) . . . 28
 - using to enter numbers 28
- Display
 - backlight 41
 - changing display language 40
 - in idle status 18
 - memory (directory/call-by-call) . . . 27
 - missed appointments/
 - anniversaries 35
 - network mailbox report 32
 - screensaver 40
 - setting 40
- Display keys 1, 17
 - assigning 39
- Disposal 46
- E**
- Earpiece mode 24
- Earpiece volume 41
- ECO DECT 33
- E-mail address
 - copying from the directory 28
- End call key 1, 23
- Ending, call 23
- Entry
 - selecting from directory 26
- Environment 46
- Error tone 43
- F**
- Fast access
 - network mailbox 32
- Firmware Update 49
- G**
- General troubleshooting 45
- Group call 24
- H**
- Handset
 - activating/deactivating 19
 - advisory tones 43
 - contact with liquid 47
 - display backlight 41
 - display language 40
 - earpiece volume 41
 - handsfree volume 41
 - idle status 18
 - list 16
 - muting 24
 - registering 9
 - restoring to factory settings 43
 - screensaver 40
 - setting 39
 - setting up 8
 - using room monitor 36
- Handset operating time
 - in room monitor mode 36
- Handsfree
 - key 1
 - talking 24
- Hash key 1, 19
- Headset (Bluetooth) 37
- Hearing aids 5
- Help 45
- I**
- Icon
 - alarm clock 35
 - battery 14
 - display 17
 - for new messages 30
 - keypad lock 19
 - ring tone 42
- Idle status (display) 18
- Idle status, returning to 18
- Incorrect input (correction) 17
- Installing the base station 7
- Internal call 24
- K**
- Key 1 (fast access) 1
- Keypad lock 19
- Keys
 - Call-by-call list 1
 - control key 1, 16

Index

delete key	17
display keys	1, 17
end call key	1, 23
fast access	1
handsfree key	1
hash key	1, 19
message key	1
on/off key	1
quick dial keys	27
recall key	1
star key	1
talk key	1, 23

L

Language, display	40
Last number redial	29
List	25
call-by-call list	25
calls list	29
handsets	16
known devices (Bluetooth)	38
missed calls	29
Lock	
activating/deactivating keypad lock	19

M

Mains adapter	5
Making calls	
accepting a call	23
external	23
internal	24
Manual last number redial	29
Medical appliances	5
Memory	
directory/call-by-call	27
Menu	
end tone	43
opening	16
overview	22
prompting	18
Message key	1
opening lists	30
Microphone	1
Missed	
anniversary	35
appointment	35
calls	29
Muting the handset	24

N

Network mailbox	32
Number	
as destination for room monitor	36
copying from directory	28
copying to directory	28
entering with directory	28
saving in the directory	25

O

On/Off key	1
Order in directory	26

P

Pack contents	6
PC Interface	48

Q

Questions and answers	45
Quick dial	25, 39

R

Range	7
Recall key	1
Registering	
devices (Bluetooth)	38
handset	9
Reminder call	29
Ring tone	
changing	41
setting volume	41
Room monitor	36

S

Screensaver	40
Searching in directory	26
Sending	
directory entry to handset	27
sensitivity (room monitor)	36
Service	44
Setting	
date	12, 22
screensaver	40
time	12, 22
Setting up	
handset	8

Signal tone, see Advisory tones	
SMS list (depending on base station)	29
Snooze mode	35
Sound, see Ring tone	
Specifications	47
Star key	1

T

Talk key	1, 23
--------------------	-------

U

Update	49
USB connection	14

V

Viewing the network mailbox report	32
VIP (directory entry)	25
Volume	
earpiece	41
earpiece volume	41
handset handsfree volume	41
loudspeaker	41
ring tone	41
setting	42

W

Warning tone, see Advisory tones	
Writing an SMS (depending on base station)	47
Writing and editing text	47